

9-Axle Steerable

9-Axle Steerable Modular Trailer Configuration




Versatility

- **The 9-Axle Steerable Modular Trailer System is designed for maximum versatility and fleet utilization.**

- Interchangeable deck, jeep, and rear configurations allow the trailer to be adapted to a wide range of hauling requirements without the need for a dedicated trailer for every application. Deck styles can be changed as needed, and jeep and rear sections can be swapped between the available configurations offered to suit specific job requirements, including standard and booster ready setups. In addition, the deck system is compatible with our 13-Axle Steerable configuration, further extending cross compatibility across the fleet and improving overall equipment utilization. This Modular design gives operators greater flexibility, reduces equipment redundancy, and allows the system to grow with changing hauling demands.

Unit Dimensions & Specifications

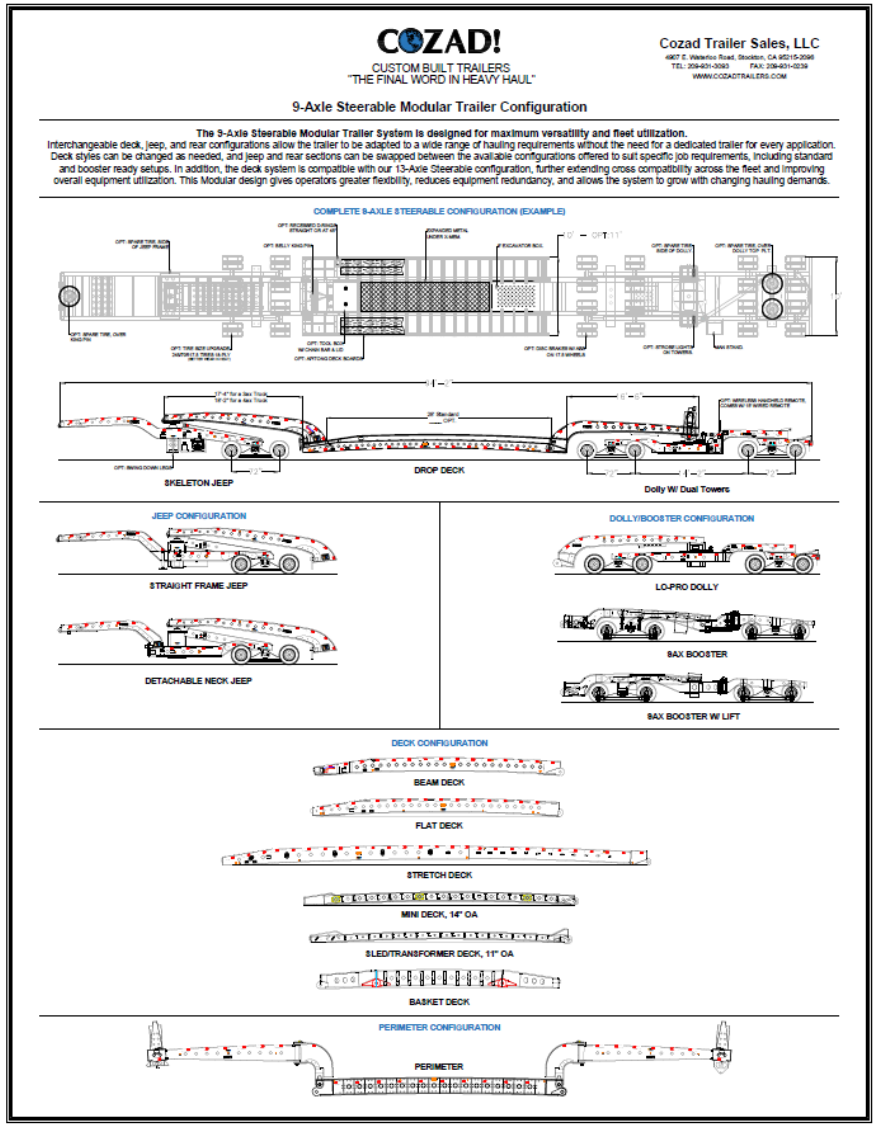

COZAD!
CUSTOM BUILT TRAILERS
"THE FINAL WORD IN HEAVY HAUL"

Cozad Trailer Sales, LLC
4967 E. Waterloo Road, Stockton, CA 95215-3096
TEL: 209-931-3393 FAX: 209-931-0239
WWW.COZADTRAILERS.COM

9-Axle Steerable Modular Trailer Configuration

The 9-Axle Steerable Modular Trailer System is designed for maximum versatility and fleet utilization.
Interchangeable deck, jeep, and rear configurations allow the trailer to be adapted to a wide range of hauling requirements without the need for a dedicated trailer for every application. Deck styles can be changed as needed, and jeep and rear sections can be swapped between the available configurations offered to suit specific job requirements, including standard and booster ready setups. In addition, the deck system is compatible with our 13-Axle Steerable configuration, further extending cross compatibility across the fleet and improving overall equipment utilization. This Modular design gives operators greater flexibility, reduces equipment redundancy, and allows the system to grow with changing hauling demands.

COMPLETE 9-AXLE STEERABLE CONFIGURATION (EXAMPLE)

SKELETON JEEP
DROP DECK
Dolly W/ Dual Towers

JEEP CONFIGURATION
STRAIGHT FRAME JEEP
DETACHABLE NECK JEEP

DOLLY/BOOSTER CONFIGURATION
LO-PRO DOLLY
9AX BOOSTER
9AX BOOSTER W/ LIFT

DECK CONFIGURATION
BEAM DECK
FLAT DECK
STRETCH DECK
MINI DECK, 14" OA
SLED/TRANSFORMER DECK, 11" OA
BASKET DECK

PERIMETER CONFIGURATION
PERIMETER

Standard Equipment & Construction

All trailers are built with 100% T-1 100,000 high tensile Swedish Strenx700 Steel.

Lighting;

Maxxima sealed wiring loom system; all LED

Paint;

Standard Cozad (Black or White) or Your Color.

2 coats epoxy primer + 2 coats acrylic polyurethane paint



Skeleton Jeep

Standard Equipment

Cozad 16 Tire Skeleton Jeep with Front Gooseneck. Non detachable 11’ Gooseneck on Jeep with 3 King settings.

Load Specification

120,000lbs (54,422kg) fifth wheel load

Tires; **Wheels;**

215/75R17.5 @30" height 16-ply 6.75 x 17.5 Steel Disc White 8 hole

Brakes;

S-cam 12.25"x7" with auto slack adjusters & ABS*

Axles; Suspension;

4 @ 25,000lb at 72" axle spacing. Walking beam, rubber bushed

Hydraulic;

System W/ Honda 20hp gas engine, 50-ton rams with 24" lift

Optional;

80 - 100-Ton Rating

APPROX. Weight (+/-3%); **11,500 LBS Jeep**
6,500 LBS Gooseneck
18,000 LBS Total



Straight Frame Jeep

Standard Equipment

Cozad 16 Tire Straight Frame Jeep with Front Gooseneck. Non-Detachable 11’ Gooseneck on the Jeep with 3 King Pin settings.

Load Specification;

120,000lbs (54,422kg) fifth wheel load, with 8.25” Tower Adjustment for weight Distribution

Tires;

215/75R17.5 @30" height 16-ply

Wheels;

6.75 x 17.5 Steel Disc White 8 hole

Brakes;

S-cam 12.25"x7" with auto slack adjusters & ABS*

Axles;

4 @ 25,000lb at 72" axle spacing.

Suspension;

Walking beam, rubber bushed

Hydraulic;

System W/ Honda 20hp gas engine, with 24" lift

Optional;

90-120-Ton rating

APPROX. Weight (+/-3%):

16,120 LBS JEEP
6,500LBS GOOSENECK
22,620 LBS TOTAL





Drop Side Deck

Standard Equipment

Deck Specification;

80-ton rating, 10' wide Drop deck design, Length: 28' std

Decking;

3” Doug Fir, Optional 3” Apitong

Accessories;

Storage Box, 6' Excavator Tray, 1-1/4" LED lights 4 per side of deck and Outrigger Clips

Optional; 80-120-Ton Rating, Deck Extensions, Outside Pin Joints, Belly Pin, D-Rings and more.

APPROX. WEIGHT (+/-3%): 14,000LBS

Beam Deck

Standard Equipment

Deck Specification;

59" wide Beam deck design, Length: 28' std.

Accessories;

Storage Box, 6' Excavator Tray, 1-1/4" LED lights 4 per side of deck

Optional;

Toolbox with Lid & Chain Bar, Belly King Pin, Longer Deck, Sliding Bolsters and more.

APPROX. WEIGHT (+/-3%)	**11,800LBS**



Flat Deck

Standard Equipment

Deck Specification;

80-ton rating, 10' wide Flat deck design, Length: 28' std.

Decking;

3” Doug Fir, Optional 3” Apitong

Accessories;

Storage Box, 6' Excavator Tray, 1-1/4" LED lights 4 per side of deck.

Optional;

80-120 Ton Rating, D-Rings, Heavy Duty Outriggers, Toolbox with lid & Chain Bar, and more.

APPROX. WEIGHT (+/-3%); 16,000LBS



Stretch Deck

Standard Equipment

Deck Specification;

80-Ton rating,10' Wide Stretch Deck design, Length: 30'-50’ or 36’-60’

Decking;

3” Doug Fir, Optional 3” Apitong

Accessories;

Storage Box, 6' Excavator Tray, 1-1/4" LED lights 4 per side of deck.

Optional;

Heavy Duty Outriggers, D-Rings or C-Rings, Outside Pin Joint, Sliding Bolsters and more.

APPROX> WEIGHT (+/-3%); **26,900LBS**



Mini Deck

Standard Deck

Deck Specification;

14” Overall, Height, 10' wide Flat deck design, Length: 30' std.

Decking;

3” Doug Fir

Accessories;

Wire Mesh under Cross Members, 1-1/4" LED lights 4 per side of deck.

Optional;

Removeable D-rings, Deck Extensions

APPROX. WEIGHT (+/-3%);	21,500LBS



Transformer Deck

Standard Equipment

Deck Specification;

11” Overall, Height, 10' wide Flat deck design, Length: 28' std.

Accessories;

Storage Box, 1-1/4" LED lights 4 per side of deck, C-Rings

APPROX. WEIGHT (+/-3%); 19,660LBS



Basket Deck

Standard Equipment

Deck Specification;

Torque Boxes with Perimeter deck design, Length: 30' std.

Accessories;

4” Low Removable Crossmembers, 1-1/4" LED lights 4 per side of deck

Optional;

80-ton – 100-ton Rating, Rotating D-rings, Deck Extensions

APPROX. WEIGHT (+/-3%); **27,780LBS**





Perimeter Deck

Standard Equipment

APPROX. WEIGHT (+/-3%);

14,000LBS ea. Gooseneck
9,200LBS for set of 30’ Beams
660LBS per Cross member

Gooseneck Specification;

80-ton Expanding necks 12' - 20' on 6" increments, 36" lift on each lifting Gooseneck. with 18’-4” I.D.

Closed;

12’ O.D. with 10’-4” I.D.

Open;

20’ O.D

Beam Deck Specification;

30' Beams, 24” tall Web

Accessories;

1-1/4" LED lights 4 per side of deck, LED spotlights, Road Skids, 4” Low Crossmembers (12 included) , & Rotating D-Rings (8 included)

Optional;

Beam Extensions, Adapters for Straight Frame Jeep and Dolly, 90-100 Ton Rating.

Dolly w/ Dual Towers

Standard Equipment

Cozad 32 Tire Dolly with Dual Rear Gooseneck.

Load Specification

120,000lbs (54,422kg) fifth wheel load

Tires;

215/75R17.5 @30" height 16-ply

Wheels;

6.75 x 17.5 Steel Disc White 8 hole

Brakes;

S-cam 12.25"x7" with auto slack adjusters & ABS*

Axles;

8 @ 25,000lb at 72" axle spacing.

Suspension;

Walking beam, rubber bushed

Hydraulic;

System W/ Honda 20hp gas engine, with 24" lift

Accessories;

Oversize Load sign, 1-1/4" LED lights (3 per side on Dolly and 3 per side on Gooseneck)

APPROX. WEIGHT (+/-3%); **18,500LBS Dolly**

7,300LBS Gooseneck

25,300LBS Total



Lo-Pro Dolly

Standard Equipment

Cozad 32 Tire Lo-Pro Dolly with no Tower on Rear Gooseneck.

Load Specification

120,000lbs (54,422kg) fifth wheel load

Tires;

215/75R17.5 @30" height 16-ply

Wheels;

6.75 x 17.5 Steel Disc White 8 hole

Brakes;

S-cam 12.25"x7" with auto slack adjusters & ABS*

Axles;

8 @ 25,000lb at 72" axle spacing.

Suspension;

Walking beam, rubber bushed

Hydraulic;

System W/ Honda 20hp gas engine, with 24" lift

Accessories;

Oversize Load sign, 1-1/4" LED lights (3 per side on Dolly and 3 per side on Gooseneck)

APPROX. WEIGHT (+/-3%);

18,000LBS Dolly

6,700LBS Gooseneck

24,700LBS Total



Booster

Standard Equipment

Cozad 80-Ton Booster 9-Axle.

Deck Specification

10' Drop deck design, No Pin Joint — Length: 28' std.

Tires; — **Wheels;**

215/75R17.5 @30" height 16-ply — 6.75 x 17.5 Steel Disc White 8 hole

Brakes;

S-cam 12.25"x7" with auto slack adjusters & ABS*

Axles; — **Suspension;**

8 @ 25,000lb at 72" axle spacing. — Walking beam, rubber bushed

Accessories;

Storage Box, 6' Excavator Tray, Oversize Load sign, 1-1/4" LED lights

Optional;

Belly Pin, Toolboxes, Dropped Islands, Bump Steering and Pin Joints

APPROX. WEIGHT (+/-3); — **24,200 LBS Trailer Axles**

8,040 LBS Booster

32,240 LBS Total



Booster with 12” Lift

Standard Equipment

Cozad 80-Ton Booster 9-Axle.

Deck Specification

10' Drop deck design, No Pin Joint

Length: 28' std.

Tires;

215/75R17.5 @30" height 16-ply

Wheels;

6.75 x 17.5 Steel Disc White 8 hole

Brakes;

S-cam 12.25"x7" with auto slack adjusters & ABS

Axles;

8 @ 25,000lb at 72" axle spacing.

Suspension;

Walking beam, rubber bushed

Accessories;

Storage Box, 6' Excavator Tray, Oversize Load sign, 1-1/4" LED lights

Optional;

Belly Pin, Toolboxes, Dropped Islands, Bump Steering and Pin Joints

APPROX. WEIGHT (+/-3);

34,220 LBS Trailer

7,220 LBS Booster

41,440 LBS Total





Cozad Trailer Sales, LLC
4907 E. Waterloo Road, Stockton, CA 95215-2096
TEL: 209-931-3093 FAX: 209-931-0239
WWW.COZADTRAILERS.COM

Warranty: One-year warranty @ **FOB Stockton, Ca**

Estimated delivery is a minimum of 6-8 months from receipt of signed order and a 25% non-refundable deposit. Estimated delivery time is subject to change based on in-house workload at time of order placement. Addition of available options may add to tare weight. Please note-financing must be in place prior to completion; balance of sale is due upon completion of trailer. This quote is good for seven (7) days only. All trailers' sales are F.O.B Stockton, Ca.