

35-Ton Slide Axle

Cozad 35-Ton Slide Axle, 4 Frame 8 Tire

Unit Dimensions & Specifications



COZAD!

CUSTOM BUILT TRAILERS
"THE FINAL WORD IN HEAVY HAUL"

Ton Slide Axle

GN SPECIFICATIONS

35-Ton, 2-axle, 4-frame 8-tire Hydraulic Slide Axle Trailer with a Fixed Gooseneck, built with **100% T-100 100,000 high tensile Swedish Strenx 700 steel.**

NDARD EQUIPMENT

neck Specifications;
design, fixed 9'-7" w/ 1 king pin setting
Specifications; Decking;
Flat Deck 1-5/16" Apitong Shiplap
Wheels;
17.5 @ 31"ht. 6.75 x 17.5 Steel Disc White 8 hole
x 7" on 17.5 with auto slack adjusters w/ ABS*
Suspension;
,000lb on 49" Axle Spacing Air Ride- Ridewell
plus flashing lights.
epoxy primer + 2 coats acrylic polyurethane paint
Brand); *Standard Cozad White or Black.*

ngth - 26'	☐	Deck Length - 40'	☐
ll Length	35'-11"	A - Overall Length	49'-11"
Length	26'-0"	B - Deck Length	40'-0"
neck Length	9'-7"	C - Gooseneck Length	9'-7"
r Swing	5'-10"	D - Tractor Swing	5'-10"
el Base	27'-0"	E - Wheel Base	40'-1"
e Width	8'-6"	Tire Width	8'-6"
Height	38"	F - Deck Height	38"
	12"	Load Angle	7°

APPROX. WEIGHT (± 3 %): 14,200 LBS

ACCESSORIES

Wide Load Light Plugs (front and rear STD.)
20,000lb Hydraulic winch set up for PTO. (99' x 5/8" Wire Rope)
Hand held wireless remote installed that operates the winch & slide axle
Crank down drop legs; 2-speed
High Polish Aluminum 8-hole 17.5 wheels
Deck Cut-Out holes in top frame rails for 3/8" chain (19 per side)
2 Toolboxes in front corners of Gooseneck w/ steel lid and pin to lock.

OPTIONS

Winch Roller in Center of Gooseneck
Synthetic rope 9/16" x 99' in liej of STD. wire rope
Oversize Load Sign
Engine package(to run bigger flow hydraulic pump system enclosed under Gooseneck area w/ Aluminum cover / 23.5 Kohler pony motor with electric start; added weight 350-400lbs)
Meritor Air Inflation system(to keep constant air to tires for better tire wear @ $950 per axle x 2)
Spare Tire bracket (in front of Gooseneck, installed upright w/ pin lock)
One Spare Tire, 8-hole 17.5 High Polish aluminum wheel
Chain slot strip (down center of deck, full length)
Channel Wear Strips (1ea side against inside of top strap; 6" wide, set $\frac{1}{16}$" higher for sliding containers)
Spring loaded fold-down side step (1ea per side of Gooseneck)
Disc Brakes with ABS on 17.5 Wheels @ $4,500 per axle x 2

Warranty:
Estimated delivery is a minimum of 6-8 months from receipt of signed order and a 25% non-refundable deposit. Estimated delivery time is subject to change based on in-house workload at time of order placement. Estimated unit weight is 14,200lbs +/- 3%- addition of available options may add to tare weight. Please note-financing must be in place prior to completion; balance of sale is due upon completion of trailer. This quote is good for seven (7) days only. All trailers sales are F.O.B Stockton, Ca.

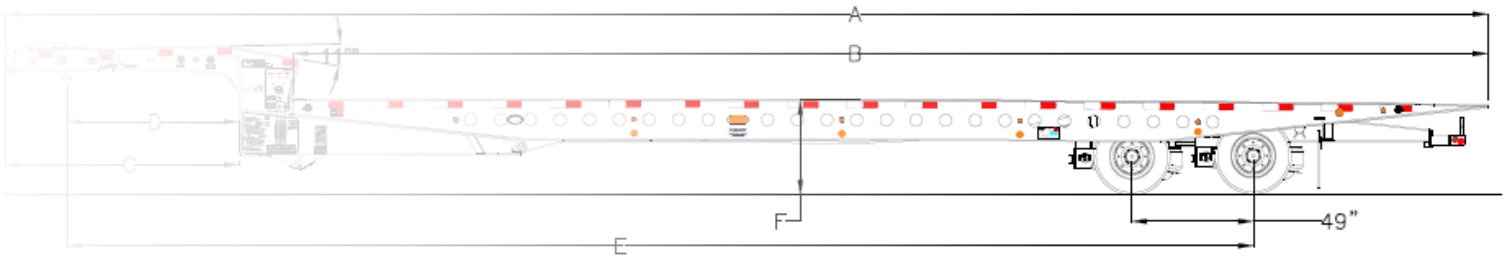

Cozad Trailer Sales, LLC
4907 E. Waterloo Road, Stockton, CA 95215-2096
TEL: 209-931-3093 FAX: 209-931-0239
WWW.COZADTRAILERS.COM

sales@cozadtrailers.com
Cozad Financing Available!

A Cozad 35-ton slide axle trailer provides a low-profile design that maximizes payload capacity and simplifies loading for heavy equipment

- **Industry-Leading Light Weight:** Weighing around 17,600 to 17,680 lbs, it is one of the lightest 35-ton slide axle trailers available, allowing you to haul more legal payload

- **Smooth Sliding/Traveling Mechanism:** Hydraulic slide axle operation creates a gentle loading angle, eliminating the need for heavy separate ramps and speeding up load/unload times.

- **Air Ride Suspension:** Delivers a stable, cushioned ride that protects sensitive cargo and reduces wear and tear on the trailer.



Standard Equipment

Gooseneck Specifications;

Wide design, fixed 9'-7" w/ 1 king pin setting

Deck Specifications;

8'-6" Flat Deck

Decking;

1-5/16" Apitong Shiplap

Tires;

235/75R17.5 @ 31"ht.

Wheels;

6.75 x 17.5 Steel Disc White 8 hole

Brakes;

12.25" x 7" on 17.5 with auto slack adjusters w/ ABS*

Axles;

2 @ 22,000lb on 49" Axle Spacing

Suspension;

Air Ride- Ridewell

Lighting;

All LED plus flashing lights.

Paint;

2 coats epoxy primer + 2 coats acrylic polyurethane paint

Standard Cozad (Black or White)



Accessories

Wide Load Light Plugs (front and rear STD.)

20,000lb Hydraulic winch set up for PTO. (99' x 5/8" Wire Rope)

Hand held wireless remote installed that operates the winch & slide axle

Crank down drop legs; 2-speed

High Polish Aluminum 8-hole 17.5 wheels

Deck Cut-Out holes in top frame rails for 3/8" chain (19 per side)

2 Toolboxes in front corners of Gooseneck w/ steel lid and pin to lock.



Options

Winch Roller in Center of Gooseneck

Synthetic rope 9/16" x 99’ instead of STD. wire rope

Oversize Load Sign

Engine package(to run bigger flow hydraulic pump system enclosed under Gooseneck area w/ Aluminum cover / 23.5 Kohler pony motor with electric start; added weight 350-400lbs)

Meritor Air Inflation system(to keep constant air to tires for better tire wear @ $950 per axle x 2)

Spare Tire bracket (in front of Gooseneck, installed upright w/ pin lock)

One Spare Tire, 8-hole 17.5 High Polish aluminum wheel

Chain slot strip (down center of deck, full length)

Channel Wear Strips (1ea side against inside of top strap; 6" wide, set 1/16" higher for sliding containers)

Spring loaded fold-downside step (1ea per side of Gooseneck)

Disc Brakes with ABS on 17.5 Wheels@ $4,500 per axle x 2



Cozad Trailer Sales, LLC
4907 E. Waterloo Road, Stockton, CA 95215-2096
TEL: 209-931-3093FAX: 209-931-0239
WWW.COZADTRAILERS.COM

Warranty:

Estimated delivery is a minimum of 6-8 months from receipt of signed order and a 25% non-refundable deposit. Estimated delivery time is subject to change based on in-house workload at time of order placement. Estimated unit weight is 14,200lbs +/- 3%- addition of available options may add to tare weight. Please note-financing must be in place prior to completion; balance of sale is due upon completion of trailer. This quote is good for seven (7) days only. All trailers' sales are F.O.B Stockton, Ca.